


# K042

## Double Metal Cradle Swing


### INFORMATION ABOUT PRODUCT

Minimum Space	350x700x317 cm
Impact Protection net	24,5 m <sup>2</sup>
Dimensions	350x34 cm
Overall Height	221 cm
Free falling height	130 cm
Foundations	2 pcs
Availability of spare parts	YES
Product complies with EN 1176	YES
Age range	1,5-4
Amount of users	2

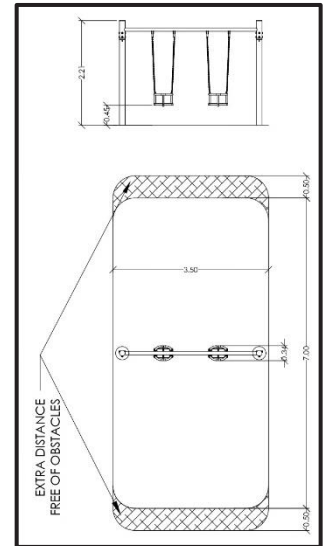

### MATERIALS

- Top Axle: Hot Dip Galvanized metal circular cross section cross bar with large steel end plates attached
- Footings: Hot Dip Galvanized and powder coated Steel tubes
- Decorative Panels: HPL (EXT)
- Chains: Hot Dip Galvanized (plain) or Stainless Steel (304 / 316L) / Ø6mm / According to DIN 766
- Swing joints, Galvanized or Stainless-steel heavy duty with nylon bearings
- Swing seat (child): Injection molded TPE (thermoplastic elastomer) reinforced with an aluminum insert plate
- Swing seat (toddler): Injection molded TPE (thermoplastic elastomer) reinforced with an aluminum insert plate. Protective apparatus made in the same manner.
- Nest swing 'rosette': Hot Dip Galvanized steel ring wrapped with steel core rope braided with polypropylene. Seat made of steel-rope chain-link mat. The suspension ropes are made with steel core rope braided with polypropylene ending with a stainless-steel chain on the top end to adjust the suspension length. The shackles are made in high-quality stainless steel. All of the clip rings are made in aluminum.
- Fasteners: Electroplated coated or Stainless Steel (304 / 316L)
- Ground Anchors: Hot Dip Galvanized steel

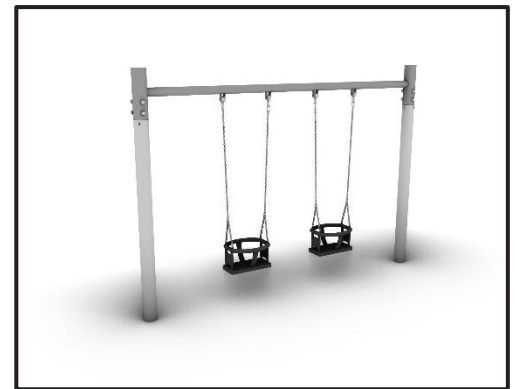

**Please note that the above list of materials concerns the articles of the whole series. Therefore, some of them are not used in the described article.**